

Ideas made to move **innovation**



OPERATING INSTRUCTIONS

OPENING / CLOSING THE SLEEPER



DRIVERGE[®]
VEHICLE INNOVATIONS

855-337-9543 • Driverge.com

I. OPENING THE SLEEPER

Note: Please make sure to open at least one door or window so that the air can escape when opening the roof.



1. Unbutton the snaps for the access cover above the cabin.



2. Open the Velcro® fasteners for the tent fabric (3 fasteners).

Note: Risk of damage to the tent fabric if the fasteners are not opened!



3. Open the **Click-Lock** buckle for the sleeper by pressing the plastic inset and then slide the metal part off. (driver's side as well as passenger's side).



4. Unlock the roof, using the steps below.
These steps must be performed on both the driver's and passenger's side roof locks.

- a. Flip the handle of the locking mechanism up so that it is perpendicular to the catch.
- b. Turn the handle counterclockwise to release.
- c. Fold the handle down so it is parallel with the catch.
- d. Secure the locking mechanism to the magnet (marked in red picture 4d) on the roof shell.

Note: After releasing the locking mechanism in steps b and c, it is mandatory to secure the locking mechanism to the magnet on the roof shell in order to avoid damaging the tent fabric!





5. Finally, the sleeper can be raised using the two handles on the underside of the roof.

Note: The pop up bed must be raised in order to provide comfortable headroom in the vehicle.



6. The access cover can be rolled up and affixed with the marked snap. It can also be draped over the headreasts of the front seats as a privacy curtain to cover the windshield.



II. CLOSING THE SLEEPER

Note 1: Please make sure all pop up windows are fully closed and zipped before closing the roof.

Note 2: Please open at least one vehicle door or window so that the air can escape when closing the roof.



1. Unsnap and unroll the access cover.




2. Lower the pop up bed before closing the roof. Verify that the locking mechanism is secured to the magnet on the roof shell.



3. Facing the rear of the vehicle, pull down the roof shell slowly.

Note: While lowering the roof, make sure that the tent fabric is pulled to the inside of the vehicle to avoid being pinched between the pop up and the roof base.

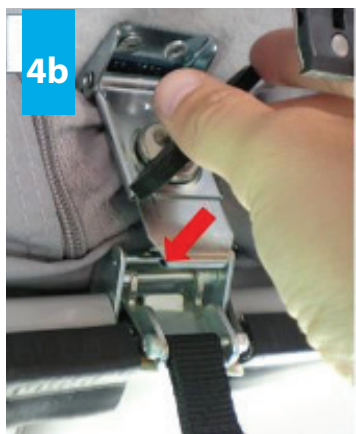


4. To lower and secure the sleeper, follow the steps below. These steps must be performed on both the driver's and passenger's side roof locks.
 - a. Tuck the the tent fabric behind the locking mechanism so there is room to latch the locking mechanism without making contact with the fabric.
 - b. Release the locking mechanism from the magnet and insert into the catch.
 - c. Flip the handle so that it is perpendicular to the locking mechanism and turn it clockwise to latch the top.
 - d. Flip the handle up so that it lies flat.

Note: Make sure that the tent fabric is not pinched by or caught on the roof locks.

Step 4 continued on next page



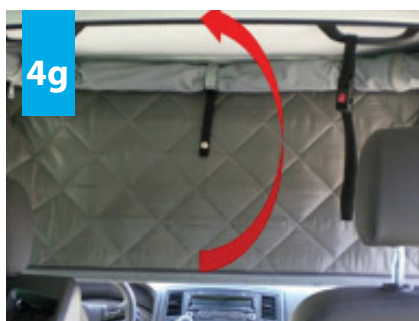

Step 4 continued from previous page

- e. Close the **Click-Lock** buckle for the sleeper.
- f. Roll up the remaining tent fabric in front of the sleeper and secure it using the three included Velcro® fasteners.
- g. Reattach the access cover above the cabin using the snaps.
- h. Tuck the straps into the space between the sleeper and access cover.





Now get out there and have some fun!

.....



DRIVERGE VEHICLE INNOVATIONS

1090 W Wilbeth Rd.
Akron, Ohio 44312
USA

855-337-9543
www.Driverge.com

